
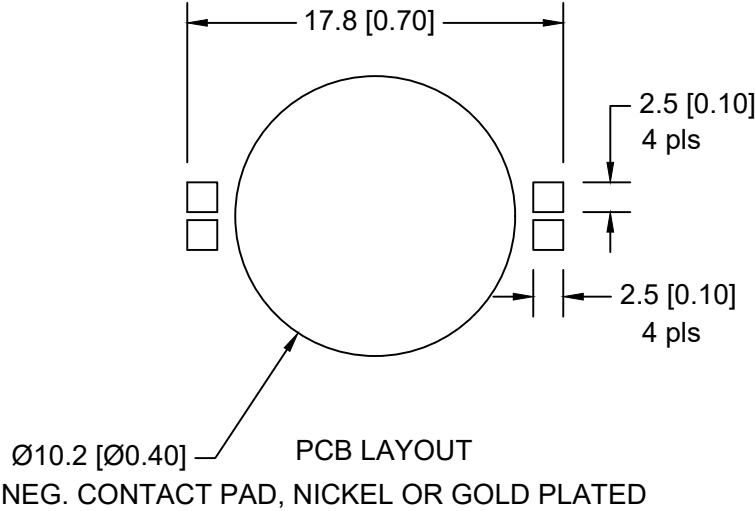


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/19/18	C	Dim. 9.60 was 9.50 Changed Positive contact pad size	T.B.	B.S.	
08/14/18	D	Added Drop test result	T.B.	B.S.	
10/24/18	E	Dim. 15.60 was 15.30 Dim. 13.80 was 13.50 Dim. 3.70 was 3.60	T.B.	B.S.	

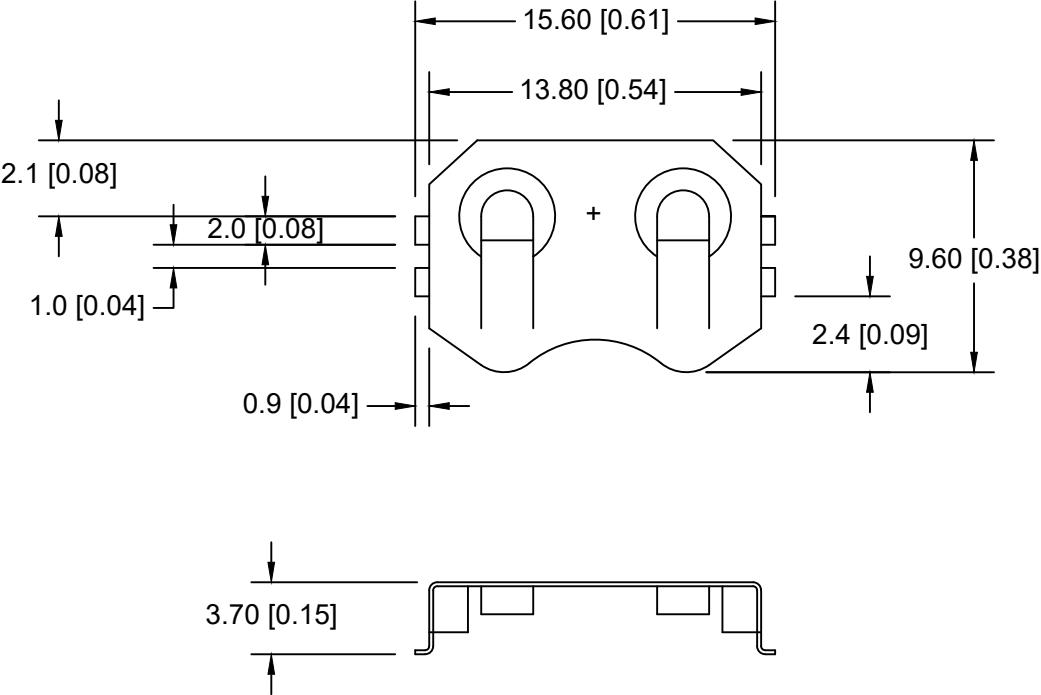

- NOTES:
- MATERIAL:
 - 0.25mm PHOSPHOR BRONZE, NICKEL PLATED OVERALL.
 - ROHS 2 COMPLIANT
 - TEMPERATURE RANGE: -40°C TO +270°C
 - * VIBRATION TEST: 10-50-10 HZ SWEEPED IN 60 SECONDS
 - X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
 - * RESULT: NO DISLODGE-
MENT OF THE CELL OR DAMAGE
NO DISCONTINUITY OVER 10 MICRO-SECONDS
 - * SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.
6 MILLISECONDS
3 SHOCK PULSES EACH DIRECTION PER
AXIS, TOTAL OF 18 PULSES
 - * RESULT: NO EVIDENCE OF PHYSICAL DAMAGE
 - * DROP TEST: MOUNTED ON BOARD AND DROPPED 1 TIME PER
DIRECTION FROM 1m HIGH TO WOODEN FLOOR
 - * RESULTS: NO DISLODGE-
MENT OF THE CELL, NO DAMAGE TO THE
HOLDERS

WEIGHT: 0.37grams

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.1 (.004)			Scale Drawn By B.S. Approved By T.B.
Fractional ± .2 (.008)	Title CR1216,1220,1225 BATTERY RETAINER		
Angular ±0.5°	Date 10/24/18	Drawing Number BK-916	