

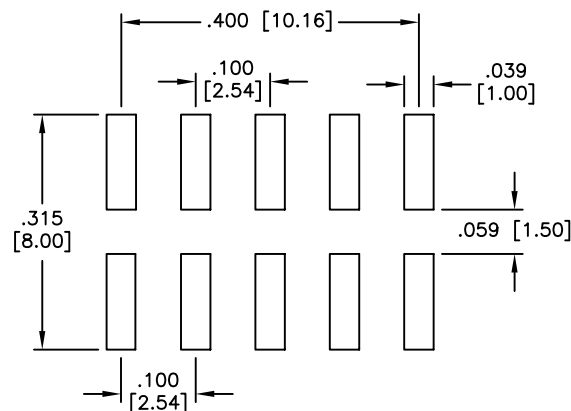
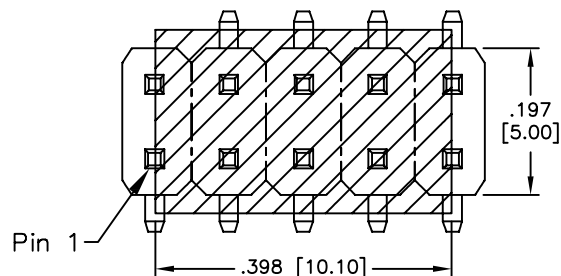


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/25/15	
A		UPDATED PACKING DRAWING	3/22/16	HR/OC

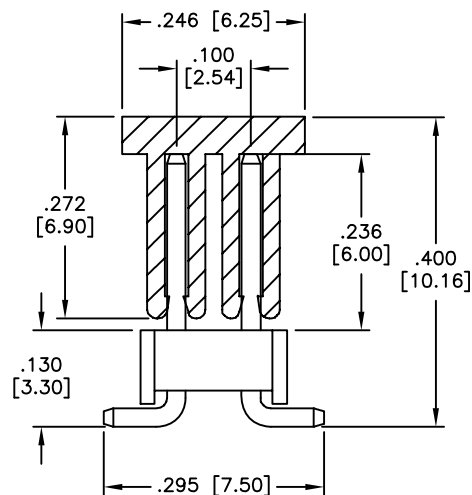

RECOMMENDED PCB LAYOUT

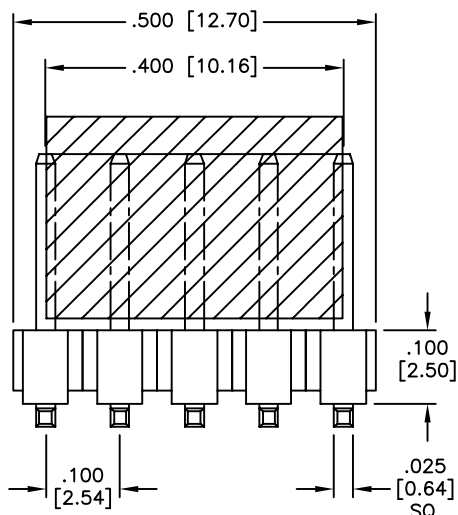

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall.
 Electrical:
 Current rating: 3 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min @ 500 VDC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ±.10 .XX ± .020 Ø.XX ±.015 .XXX ± .015 Ø.XXX ±.010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS			TITLE		
DRAWN		HR	.100 [2.54] DUAL ROW PIN HEADER, CAP		
CHECKED		GC	SURFACE MOUNT, GOLD PLATED		
APPROVED			SIZE X	PART NO. PH2-10-UA-SMT-PP-T/R	REV. A
			REF: S00059T	SCALE: NTS	SHEET 1 OF 2

6

5

4

3


2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

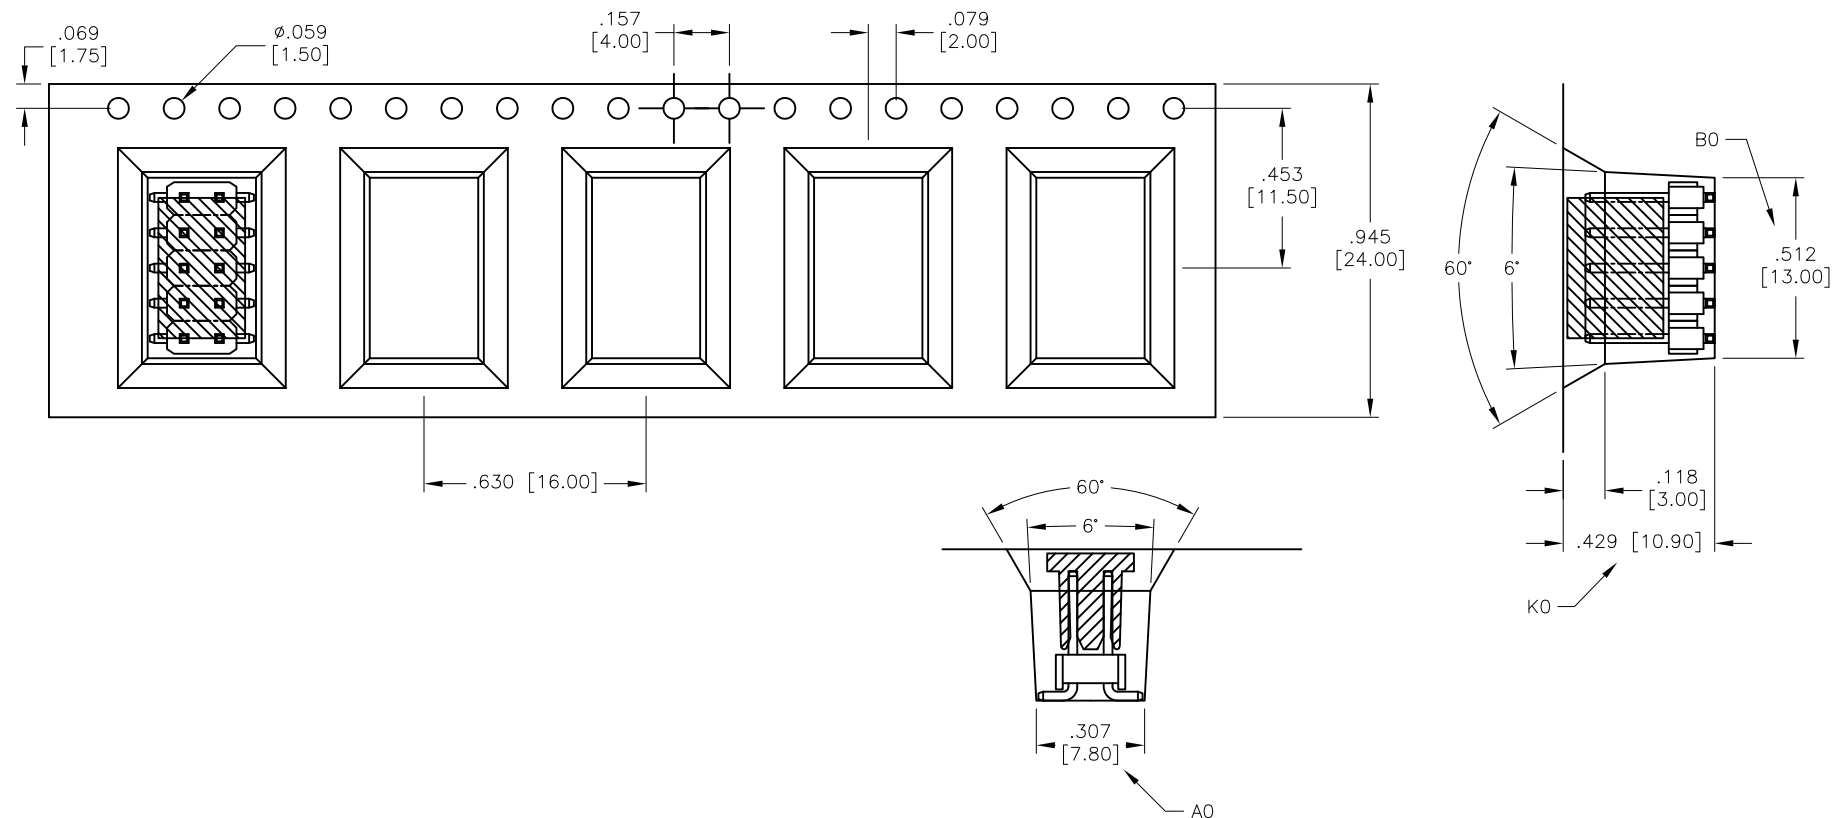

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance $\pm$ 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
6. 22" 1R= 18M 1050PCS 13"1R=6M 350PCS

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	$\pm$.10	$\varnothing$.X	$\pm$.10
.XX	$\pm$.020	$\varnothing$.XX	$\pm$.015
.XXX	$\pm$.015	$\varnothing$.XXX	$\pm$.010

APPROVALS		DATE
DRAWN	HR	2/25/15
CHECKED	GC	2/25/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE .100 [2.54] DUAL ROW PIN HEADER, CAP
SURFACE MOUNT, GOLD PLATED

SIZE	PART NO.	REV.
X	PH2-10-UA-SMT-PP-T/R	A

REF: S00059T	SCALE: NTS	SHEET 2 OF 2
--------------	------------	--------------

6

5

4

3

2

1